LEGEND

- MINOR CONTOUR INTERVAL 1m
- MAJOR CONTOUR INTERVAL 5m
- CADASTRAL BOUNDARY
- TE KUHA ROUTE 3
- TE KUHA ROUTE 5

DATUM NOTE

COORDINATE DATUM : GEODETIC 2000
IN TERMS OF NZTM 2000
HEIGHT DATUM : MSL LYTTELTON
ORIGIN: BM NN84 RL 27.54m
ALL ELEVATIONS ARE IN METRES

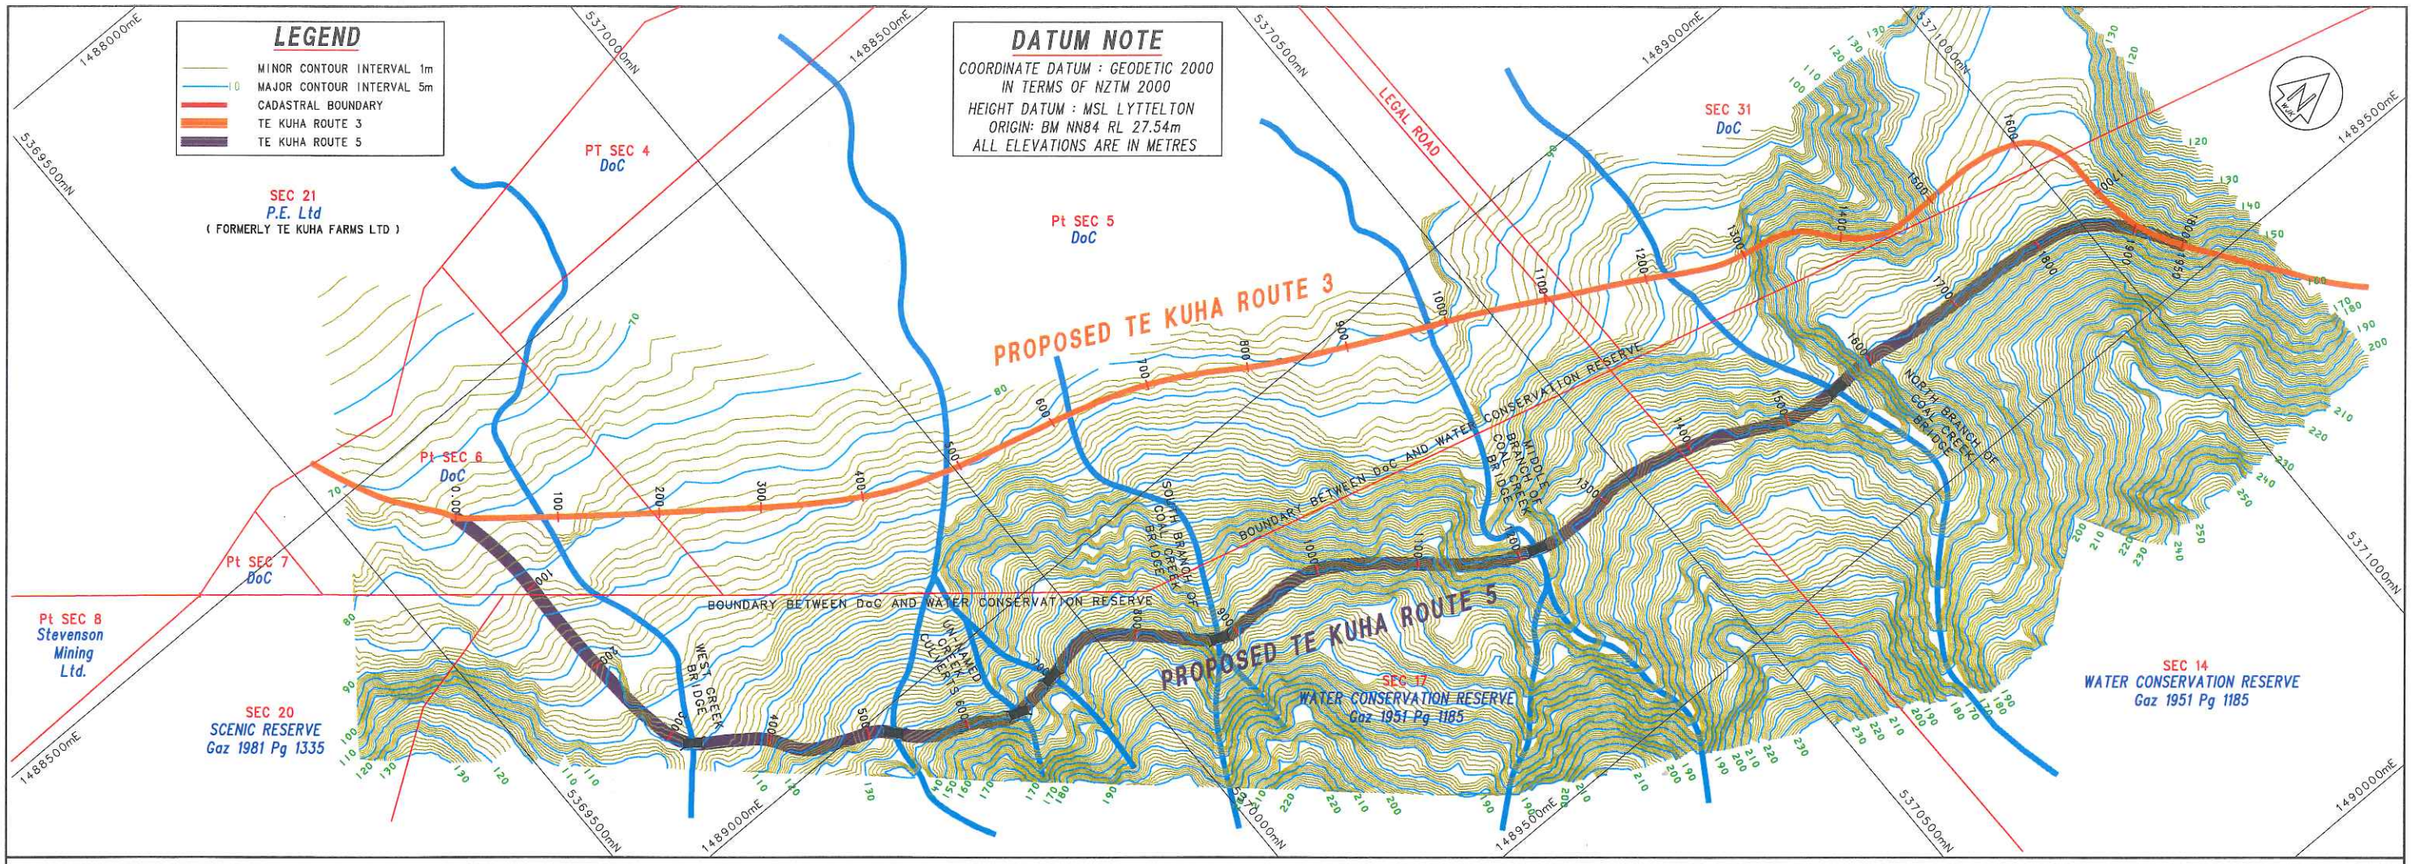

Horizontal Scale 1 : 3000 (A1)
Vertical Scale 1 : 3000 (A1)

Chainage	Fill	Cut	TEKUHA 5A DESIGN Elevation	EXISTING GROUND Elevation
0.00	0.01		74.00	73.99
50.00	1.52		79.00	77.48
100.00	2.41		84.00	81.59
150.00	2.64		89.00	86.36
200.00	1.28		94.00	92.72
250.00	2.30		99.00	96.70
300.00	5.14		104.00	98.86
350.00	8.58		109.00	100.42
400.00	7.29		114.00	106.71
450.00	2.50		119.00	116.50
500.00	0.25		124.00	123.75
550.00		3.78	129.00	132.78
600.00		4.00	134.00	138.00
650.00		1.21	139.00	140.21
700.00	3.96		144.00	140.04
750.00	1.57		149.00	147.43
800.00		0.01	154.00	154.01
850.00	0.98		151.29	150.31
900.00	1.14		148.57	147.43
950.00	1.56		145.86	144.29
1000.00	4.19		143.14	138.95
1050.00	4.24		140.43	136.19
1100.00	0.11		137.71	137.61
1150.00	14.75		135.00	120.25
1200.00	15.92		135.71	119.80
1250.00	6.29		136.43	130.13
1300.00	1.75		137.14	135.39
1350.00	0.47		137.86	137.38
1400.00		0.88	138.57	139.45
1450.00		0.47	139.29	139.76
1500.00	4.45		140.00	135.55
1550.00	17.34		143.33	125.99
1600.00		3.53	146.67	150.20
1650.00		0.52	150.00	150.52
1700.00		1.71	153.33	155.04
1750.00	0.14		156.67	156.53
1800.00		0.02	160.00	160.02
1850.00		2.74	158.34	161.08
1900.00		0.90	156.68	157.57
1950.00		0.00	155.00	155.00

Prepared for:

STEVENSON MINING LTD.

0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150mm

PROPOSED ACCESS ROUTE 5
FROM TE KUHA TO MINE-SITE THROUGH WATER CONSERVATION RESERVE
(TO REPLACE SHEET 5 OF OCTOBER 2014)

CHRIS J COLL SURVEYING Ltd.
Regd Land Surveyor, Resource Management Consultant
19 BROUGHAM STREET PO BOX 204 WESTPORT

DRAWN	WARREN KEOGHAN.	CHECKED	CHRIS J COLL.	SCALES	1:3,000 (A1)
DATE	NOVEMBER 2015.	REF	2787 ACCESS ROUTES LS.		1:6,000 (A3)

SHEET 5

SERIES 5 OF 33